



# DIRIS A80

## Multifunction meters - PMD + RCM

monitoring energy and fault currents - dimensions 96 x 96 mm

**Single-circuit metering,  
measurement &  
analysis**



### Function

**DIRIS A80** is a complete panel mounted multifunction meter which incorporates RCM current monitoring (Residual Current Monitoring), for networks with TN-S and TT neutral systems, and enhanced data logging functions for recording curves for quality and RCM events. The DIRIS A80 supplies all the measurements required for energy efficiency projects while its RCM function provides preventative earth leakage information, essential in critical applications to avoid installation shutdowns.

### Advantages

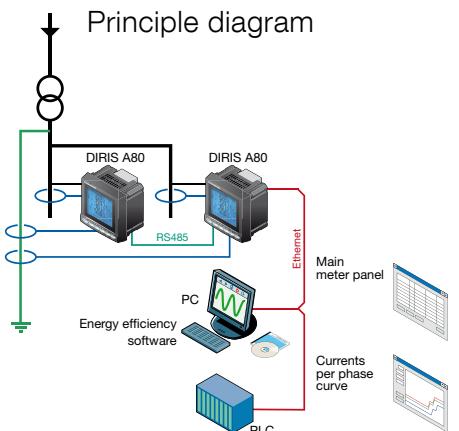
#### Compact

The DIRIS A80 combines two complementary products within a single 96 x 96 mm panel mounted case, enabling faster installation and utilising less space. The DIRIS A80 comprises:

- a multifunction meter with enhanced event logging functions which records curves for quality events.
- an RCM fault current monitoring device (Residual Current Monitoring).

#### Conformity to standard EN 50160

- EN 50160 is a standard which defines events relating to the quality of electrical networks. The DIRIS A80 captures voltage events in accordance with this standard.



#### Patent pending

Automatic adjustment of the leakage current alarm threshold in accordance with the load current to avoid false alarms.

#### Compliant with IEC 61557-12.

IEC 61557-12 is a high-level standard for all PMDs (Performance Monitoring Devices) that are designed to measure and monitor electrical parameters in distribution networks. Compliance with IEC 61557-12 ensures a high level of equipment performance, in terms of metrology, and the mechanical and environmental aspects (EMC, temperature, etc.).

### Functions

The DIRIS A80 offers the following functions:

- The monitoring of fault currents (Residual Current Monitoring)
- Multi-measurement (current, voltage, frequency, power, ...)
- Energy metering
- Harmonic analysis
- Event detection

#### Fault currents (RCM)

- Measurement of currents  $I_{\Delta n}$  ( $I_1+I_2+I_3+I_n$ ) and  $I_{PE}$  (protection conductor)
- Permanent monitoring of  $I_{\Delta n}$  and  $I_{PE}$ 
  - Fault current alarms depending on the load current
- Record of events  $I_{\Delta n}$  and  $I_{PE}$  (time, duration and curves stored)
- Alarm report output

#### Multi-measurement

- Currents
  - instantaneous:  $I_1$ ,  $I_2$ ,  $I_3$ ,  $I_n$ ,  $I_{system}$ ,
  - average/maximum average:  $I_1$ ,  $I_2$ ,  $I_3$ ,  $I_n$ ,
  - unbalance:  $U_{unb}$
- Voltages & frequency
  - instantaneous:  $V_1$ ,  $V_2$ ,  $V_3$ ,  $U_{12}$ ,  $U_{23}$ ,  $U_{31}$ ,  $F$ ,  $V_{system}$ ,  $U_{system}$
  - average/maximum average:  $V_1$ ,  $V_2$ ,  $V_3$ ,  $U_{12}$ ,  $U_{23}$ ,  $U_{31}$ ,  $F$
  - unbalance:  $U_{unb}$
- Power
  - instantaneous:  $3P$ ,  $\Sigma P$ ,  $3Q$ ,  $\Sigma Q$ ,  $3S$ ,  $\Sigma S$
  - maximum average:  $\Sigma P$ ,  $\Sigma Q$ ,  $\Sigma S$
  - predictive:  $\Sigma P$ ,  $\Sigma Q$ ,  $\Sigma S$
  - storing of load curves (60 days with an interval of 10 minutes) for the active, reactive and apparent power:  $\Sigma P +/-$ ,  $\Sigma Q +/-$ ,  $\Sigma S$

#### Power factor PF, $\Sigma PF$

- Instantaneous total tangent phi
- Instantaneous, average and max. average unbalance

#### Metering

- Active energy:  $+/- \text{kWh}$
- Reactive energy:  $+/- \text{kvarh}$
- Apparent power:  $\text{kVAh}$
- Hours  $\odot$

#### Harmonic analysis (level 63)

- Total harmonic distortion
  - Currents:  $thd I_1$ ,  $thd I_2$ ,  $thd I_3$ ,  $thd I_n$
  - Phase-to-neutral voltage:  $thd V_1$ ,  $thd V_2$ ,  $thd V_3$
  - Phase-to-phase voltage:  $thd U_{12}$ ,  $thd U_{23}$ ,  $thd U_{31}$
- Individual
  - Currents:  $H1_1$ ,  $H1_2$ ,  $H1_3$ ,  $H1_n$
  - Phase-to-neutral voltage:  $HV_1$ ,  $HV_2$ ,  $HV_3$
  - Phase-to-phase voltage:  $HU_{12}$ ,  $HU_{23}$ ,  $HU_{31}$

### The solution for

- Industry
- Infrastructure
- Health care buildings
- Data centre

### Strong points

- Compact
- Patent pending
- Management softwares
- Compliant with IEC 61557-12
- Conformity to standard EN 50160



### Conformity to standards

- IEC 62053-22 class 0.5S
- IEC 62053-23 class 2
- IEC 61557-12
- IEC 62020
- EN 50160

### Management softwares

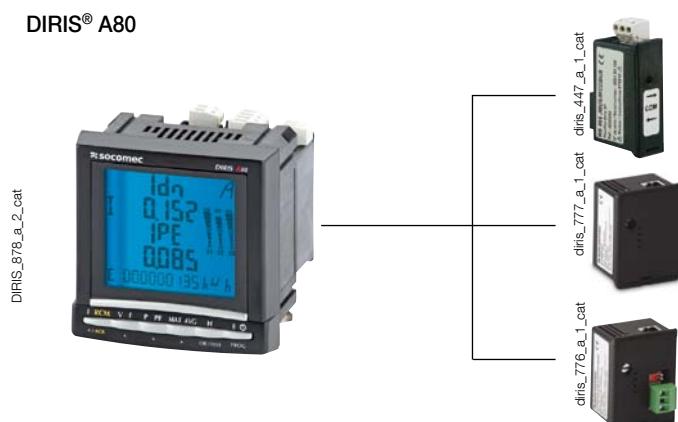
- Optional Ethernet module with Webserver function: For measurement monitoring, data exploitation and the export of load curves remotely without a specific software (web browser access).
- Analysis software: For the analysis of events data in order to improve the reliability of the electrical installation.
- Easy Config software: For quick and easy remote device configuration; configuration files can be copied from and sent to the DIRIS A80, or they can be created without communication and sent at a later time. Multiple devices can be configured from a single file, which is especially useful for OEMs and panel builders.

**Front panel**

1. Backlit LCD display.
2. Direct access key for the currents, RCM function and alarm reset.
3. Direct access key for voltages and frequency.
4. Direct access key for active, reactive, and apparent powers and power factor.
5. Direct access key for maximum and average current, voltage and power values.
6. Direct access key for harmonic values and the connection and RCM test functions.
7. Direct access key for energies, hour meter and programming menu.

**Accessories****Core balance transformer ΔIC**

See general catalogue.

**Plug-in modules****DIRIS® A80****Communication MODBUS®**

- RS485 link with MODBUS® protocol (speed up to 38400 bauds).



**Ethernet communication**

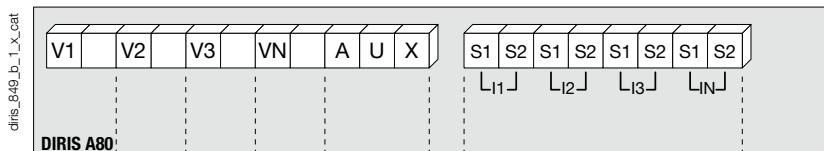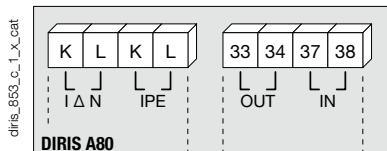- Ethernet connection with MODBUS TCP or MODBUS RTU over TCP protocol.
- Embedded Webserver function<sup>(1)</sup>.

**Ethernet communication with RS485 MODBUS gateway**

- Ethernet connection with MODBUS TCP or MODBUS RTU over TCP protocol.
- Connection of 1 to 247 RS485 MODBUS slaves.
- Embedded Webserver function<sup>(1)</sup>.

(1) See "Management softwares for DIRIS" page 140.


**Terminals****DIRIS A80****S1 - S2:** current inputs**AUX:** Auxiliary power supply U<sub>s</sub>  
**V1 - V2 - V3 - VN:** voltage inputs**RCM module****1 input / 1 output**

K-L / IΔN: residual current

K-L / IPE: ground fault current

33-34: relay outputs

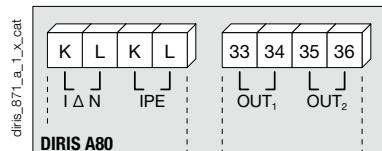37-38: opto inputs




**RCM module****2 outputs**

K-L / IΔN: residual current

K-L / IPE: ground fault current


33-34: relay output n°1

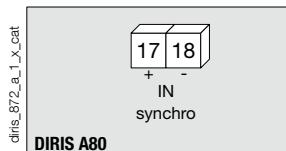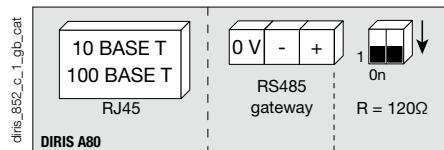35-36: relay output n°2

**Memory module****Ethernet module**

RS485 gateway resistor.

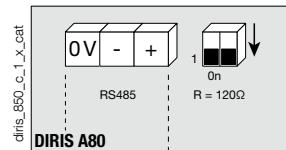R = 120 Ω: selectable internal resistance for RS485 end of line termination.

**RS485 MODBUS module**

RS485 link

R = 120 Ω: selectable internal resistance for RS485 end of line termination.

# DIRIS A80

Multifunction meters - PMD + RCM


monitoring energy and fault currents - dimensions 96 x 96 mm

## Connections

### Additional information


Communication via RS485 link

diris\_398\_c\_1\_x\_cat




Connection of voltage transformer for HV networks

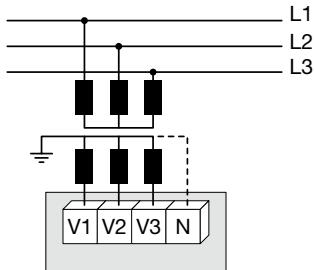diris\_399\_b\_1\_x\_cat




AC & DC auxiliary power supply

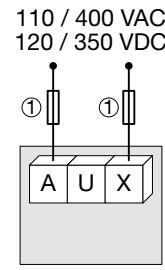

1. Fuses 0.5 A gG / 0.5 A class CC.

Three-phase + N network with RCM

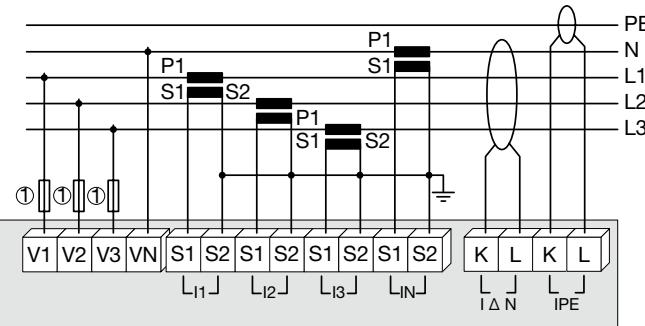
diris\_873\_a\_1\_gb\_cat



1. Fuses 0.5 A gG / 0.5 A class CC.

Single-phase network with RCM

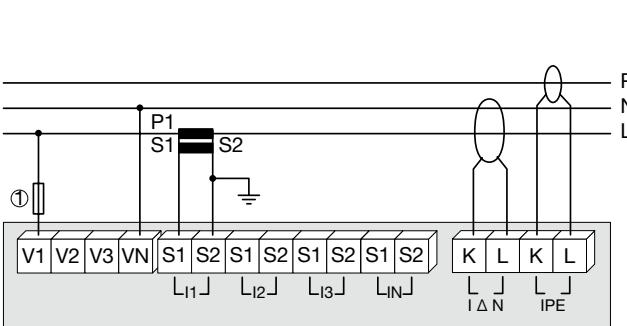diris\_874\_a\_1\_gb\_cat



1. Fuses 0.5 A gG / 0.5 A class CC.

## Electrical characteristics

### Current measurement on insulated inputs (TRMS)

Via CT primary	9 999 A
Via CT secondary	1 or 5 A
Measurement range	0 ... 11 kA
Input consumption	≤ 0.1 VA
Measurement updating period	1 s
Accuracy	0.2 %
Permanent overload	6 A
Intermittent overload	10 I <sub>n</sub> for 1 s

### Voltage measurements (TRMS)

Direct measurement between phases	50 ... 700 VAC
Direct measurement between phase and neutral	28 ... 404 VAC
VT primary	500 000 VAC
VT secondary	60, 100, 110, 173, 190 VAC
Frequency	50 / 60 Hz
Input consumption	≤ 0.1 VA
Measurement updating period	1 s
Accuracy	0.2 %
Permanent overload	800 VAC

### Current-voltage product

Limitation for 1A CT	10 000 000
Limitation for 5A CT	10 000 000

### Power measurement

Measurement updating period	1 s
Accuracy	0.5 %

### Power factor measurement

Measurement updating period	1 s
Accuracy	0.5 %

### Frequency measurement

Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Measurement updating period	0.1 %

### Energy accuracy

Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2

### Operating conditions

Operating temperature	- 10 ... + 55 °C
Storage temperature	- 20 ... + 85 °C
Relative humidity	95 %

### Auxiliary power supply

Alternating voltage	110 ... 400 VAC
AC tolerance	± 10 %
Direct voltage	120 ... 350 VDC
DC tolerance	± 20 %
Frequency	50 / 60 Hz
Consumption	≤ 10 VA

### MODBUS communication module

Link	RS485
Type	2 ... 3 half duplex wires
Protocol	MODBUS® RTU
MODBUS® speed	4800 ... 38400 bauds

### Ethernet Communication Module

Connection	RJ45
Speed	10 base T / 100 base T
Protocol	MODBUS TCP or MODBUS RTU over TCP

### Fault current monitoring characteristics (I<sub>Δn</sub> and I<sub>PE</sub>)

Inputs I <sub>Δn</sub> and I <sub>PE</sub>	
Number of inputs	2
Dedicated core balance transformers	range ΔIC – transformer ratio 600/1
Measurement of fault current I <sub>Δn</sub> / I <sub>PE</sub>	6 mA ... 30 A
Accuracy	1 %

### Alarms I<sub>Δn</sub> and I<sub>PE</sub>

Thresholds	adjustment depending on the load currents
Time setting	0 to 10 s
Logging	values, dates, durations and curves
Number of events	max. 1000 events

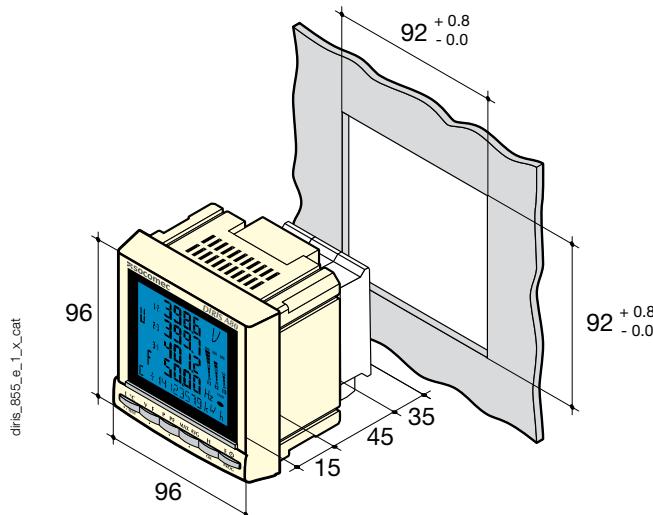
### Optocoupler input

Number	specific to the reference
Power supply	5 ... 24 VDC
Minimum signal width	10 ms
Minimum duration between 2 pulses	20 ms
Type	optocoupler

### Alarm outputs

Number of relays	specific to the reference
Type	230 VAC – 1 A
Max. N° of operations	10 <sup>4</sup>

## Case



Type	panel mounting
Dimensions W x H x D	96 x 96 x 80 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	backlit LCD display
Terminal blocks type	fixed or plug-in
Current connection cross-section	0.5 ... 6 mm <sup>2</sup>
Cable cross-section for currents ΔIn and I <sub>PE</sub>	0.14 ... 1.5 mm <sup>2</sup>
Voltage and other connection cross-section	0.2 ... 2.5 mm <sup>2</sup>
Weight	560 g

## References

Basic device	DIRIS A80
<b>Type</b>	
With 2 outputs	Reference 4825 0213
With 1 input / 1 output	Reference 4825 0214
<b>Options</b>	
<b>Plug-in modules</b>	Reference
RS485 MODBUS® communication	4825 0092
Ethernet communication (embedded Ethernet Webserver) <sup>(1)</sup>	4825 0203
Ethernet communication + RS485 MODBUS gateway (embedded Ethernet Webserver) <sup>(1)</sup>	4825 0204

(1) Dimensions: 2 slots.

Accessories	To be ordered in multiples of	Reference
<b>Description of accessories</b>		
IP65 protection	1	4825 0089
Panel mounting kit for a 144 x 96 mm cut-out	1	4825 0088
Fuse disconnect switches for the protection of voltage inputs (type RM) 3 poles	4	5601 0018
Fuse disconnect switches for the protection of the auxiliary supply (type RM) 1 pole + neutral	6	5601 0017
Fuses type gG 10 x 38 0.5 A	10	6012 0000
Ferrite to be associated with communication modules	1	4899 0011
Current transformer range	1	See page 106

Core balance transformer ΔIC	Toroid diameter (mm)	Reference
Type		
ΔIC 015	15	4950 6015
ΔIC 030	30	4950 6030
ΔIC 050	50	4950 6050
ΔIC 080	80	4950 6080
ΔIC 0120	120	4950 6120
ΔIC 0200	200	4950 6200
ΔIC 0300	300	4950 6300
Management softwares for DIRIS		See page 140

## Expert Services

- Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.

