


Product Environmental Profile



INOSYS

Manual load break switches from 160A and up to 1600A

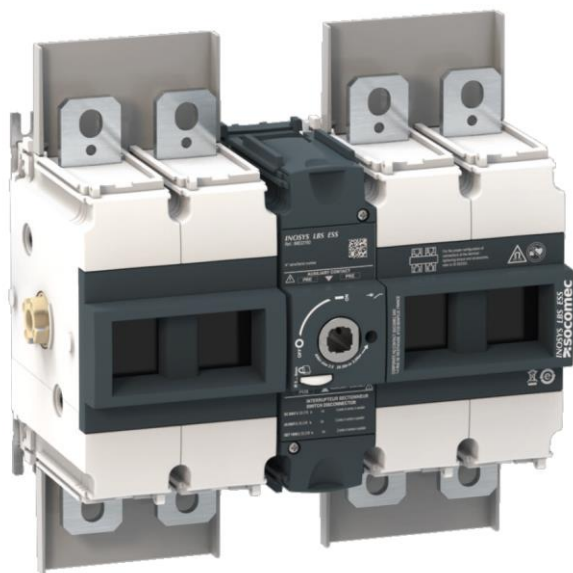

The commitments of Socomec to respect the environment

As part of its environmental policy, Socomec is committed to:

- Incorporate the principles of the circular economy into the design of new products and services
- Promote longer product lifetimes
- Promote the use of environmentally responsible materials
- Design and develop solutions to further improve the energy efficiency of our products and services
- Inform our customers in a transparent manner about the environmental impact of our products throughout their life cycle.

To this end, Socomec is committed to constantly monitoring, anticipating and complying with environmental regulations as well as customer expectations relating to its products, and to ensuring that all those involved adhere to and take responsibility for its commitments.

Socomec is member of :

ecosystem

Member of WEEE Europe



Gimélec

Environment and sustainable development commissions



PEP ecopassport® Registration number: SOCO-00067-V01.02-EN

SOCOME S.A.S

Head office : 1, rue de Westhouse – F – B.P.60010 – 67235 Benfeld Cedex

Tél : 03 88 57 41 41 – Fax : 03 88 57 78 78 – www.socomec.com

Contact : http://www.socomec.com/contact-us_en.html

socomec
Innovative Power Solutions

• Product information :

Reference product

The representative product is the INOSYS LBS 800A IEC 2P2 1500V with sales reference 86P22081 with the following description: INOSYS is a range of load break switches that can be manually controlled, they ensure on-load opening/closing and safe disconnection of any low voltage electrical circuit up to 1500VDC.

Other covered references

This PEP covers other references listed in the table at the end of the document.

Functional unit

Make and break currents by separating part of the installation from a source of electrical energy, with a rated current from 160 A and up to 1600 A and rated voltage from 1000 VDC and up to 1500 VDC, according to the appropriate use scenario, and during the reference life of 20 years of the product.

Provide isolation to ensure the disconnection of the circuit according to the appropriate use scenario.

• Materials and substances

Declaration of the constitutives materials according to IEC 62474

Total mass of the reference product (including packaging): 5,96 kg among which packaging: 0,707 kg

For the reference product

Metals		Plastics		Others	
	% weight		%weight		% weight
Other ferrous alloys - non stainless steels	17,8%	Other plastics	58,1%	Other organics	12,2%
Copper and its alloys	7,7%				
Zinc and its alloys	4,1%				
Stainless steel	<0,1%				
Other non-ferrous metals and alloys	<0,1%				
Precious metals	<0,1%				

Substances management

Socomec is leading a program to limit the use of hazardous substances in the design of new products and to monitor the presence of substances of concern in its supplies to anticipate future use restrictions.



Directive 2011/65/EU : Product references covered by this PEP meet the requirements of the RoHS Directive on the restriction of substances such as lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyl (PBB), polybrominated diphenyl ethers (PBDEs) and phthalates (DIBP, DEHP, BBP, DBP).



REACH 1907/2006 regulation: To the best of our knowledge, based on the supplier declarations, at the publication date of this document, the product do not contain any SVHC in a concentration above 0,1% per weight.

● Manufacturing

The products covered by this PEP are manufactured on the production site of ISTUN, Tunisia a site where impacts on the environment are reduced by optimizing its energy consumption and by practicing a rigorous waste management. Moreover, Socomec is committed to the progressive ISO 14001 certification of its manufacturing sites.

● Distribution

As part of its distribution policy aiming to respect the environment, Socomec is in favor of groupage transports and ISO 14001 certified logistic partners.

No reconditionning is planned for the product. This phase is consequently neglected.

The sizing of the packaging has been optimized to ensure the best possible protection of the product at the lowest possible volume in order to reduce the impact of the transport stage on the environment.

● Installation

The installation phase consists in connecting the product to the existing electrical installation.

The installation does not generate any significant impacts on the environment, except impacts from packaging waste.

● Use phase

Use phase was modelised according to the following scenario:

Geography: European energy mix

Load rate: 50% of 800A (In)

Use time rate: 30% of the time over 20 years (RLT)

Care and maintenance

The product does not require any maintenance under normal conditions of use.

Consumables

The product does not require consumables.

● End of life

End of life treatment

The following parts require specific care and selective treatment in accordance with Annex VII of the WEEE Directive 2012/19/EU - Waste of electrical and electronic equipment : *Springs*.

Other parts that require specific care when handled but are not subject to WEEE: *Neodymium magnets*

Maintenance and disassembly should always be conducted by qualified personnel.

Recovery potential of the product according to IEC TR 62635

The recovery potential of the product is 38,3%.

This covers material and energy recovery potentials.

● Environmental impacts

Calculation methodology: life cycle assessment (LCA)



The calculation of the impacts on the environment was made using a life cycle assessment methodology in accordance with the ISO 14040 requirements and with PEP eco passport product category rules. For more details follow the link:

www.pep-ecopassport.org

This study was carried out with the following version of the software EIME and of the database:

EIME version: 5.9.4

Database version: CODDE-2022-01

For biogenic carbon storage the following methodology was used : 0/0

The whole life cycle has been taken into account:

Step	Geographical representativeness	Scenario
Manufacturing (M) (A1-A3)	Production of other components and packaging : Europe Assembly : Tunisia	From the raw material extraction to the last Socomec logistic platform, including packaging Waste generated during manufacturing phase are taken into account.
Distribution (D) (A4)	Distribution scenario : Europe	From the last Socomec logistic platform to the final customer.
Installation (I) (A5)	Transport and treatment of packaging wastes : Local	Local road transport of 1000 km of generated wastes to the treatment site, end of life treatment.
Use phase (U) (B1-B7)	Energy mix : Europe	Power consumption required during 20 years and maintenance according to consumption scenario above mentioned.
End of life (EOL) (C1-C4)	Transport and treatment : Local	Road transport of 1000 km from the final customer to the treatment sites. End of life treatment.

PRODUCT ENVIRONMENTAL PROFILE

Environmental impacts of the INOSYS LBS 800A IEC 2P2 1500V, per FU

The following impacts have been calculated to best represent geographically, temporally and technologically each step of the life cycle.

Indicators	Unit	Total impact	M (A1-A3)	D (A4)	I (A5)	U (B1-B7)	EOL (C1-C4)
Resource use, minerals and metals (Abiotic resource depletion – Elements)	kg Sb eq.	1,26E-03	1,29E-03	0*	0*	1,95E-05	0*
Resource use, fossils (Abiotic resource depletion – Fossil fuels)	MJ	7,59E+03	6,72E+02	4,30E+01	9,89E+00	6,86E+03	3,17E+00
Acidification	mol H+ eq.	2,00E+00	4,31E-01	1,95E-02	3,94E-03	1,54E+00	1,33E-02
Ecotoxicity, freshwater	CTUe	3,58E+03	6,68E+02	2,07E+00	7,47E+00	2,90E+03	2,69E+00
Human toxicity, cancer	CTUh	7,44E-03	7,44E-03	0*	0*	0*	0*
Human toxicity, non-cancer	CTUh	4,70E-06	3,44E-06	5,86E-09	5,18E-09	1,25E-06	0*
Eutrophication, freshwater	kg P eq.	8,93E-04	9,16E-05	1,15E-06	6,01E-06	7,37E-04	5,70E-05
Eutrophication, marine	kg N eq.	2,53E-01	6,03E-02	9,14E-03	1,29E-03	1,75E-01	7,35E-03
Eutrophication, terrestrial	mol N eq.	3,46E+00	6,42E-01	1,00E-01	9,90E-03	2,62E+00	8,06E-02
Climate change - total	kg CO2 eq.	3,17E+02	3,98E+01	3,08E+00	1,05E+00	2,69E+02	4,25E+00
Climate change - fossil	kg CO2 eq.	7,40E-01	3,44E-01	0*	3,66E-02	3,59E-01	0*
Climate change - biogenic	kg CO2 eq.	3,17E+02	3,95E+01	3,08E+00	1,01E+00	2,69E+02	4,25E+00
Climate change - land use and land transformation	kg CO2 eq.	0,00E+00	0*	0*	0*	0*	0*
Ionising radiation, human health	kBq U235 eq.	5,93E+02	1,93E+02	0*	0*	4,00E+02	0*
Land use	No dimension	5,94E+00	5,85E-01	0*	0*	5,36E+00	0*
Ozone depletion	kg CFC-11 eq.	2,77E-06	1,52E-06	4,72E-09	5,52E-08	1,15E-06	3,62E-08
Particulate matter	disease occurrence	1,45E-05	2,40E-06	1,59E-07	2,67E-08	1,19E-05	4,49E-08
Photochemical ozone formation, human health	kg NMVOC eq.	8,21E-01	2,14E-01	2,53E-02	2,62E-03	5,60E-01	1,86E-02
Water use	m³ eq.	2,46E+01	1,41E+01	1,17E-02	3,69E-01	9,53E+00	6,17E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,32E+03	0*	0*	6,16E-01	1,32E+03	0*
Use of renewable primary energy resources used as raw material	MJ	1,75E+01	1,75E+01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,33E+03	1,52E+01	0*	6,16E-01	1,32E+03	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7,47E+03	5,51E+02	4,30E+01	9,89E+00	6,86E+03	3,17E+00
Use of non renewable primary energy resources used as raw material	MJ	1,22E+02	1,22E+02	0*	0*	0*	0*
Total use of non-renewable primary energy resources	MJ	7,59E+03	6,72E+02	4,30E+01	9,89E+00	6,86E+03	3,17E+00
Use of secondary material	kg	4,71E-01	4,71E-01	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Total Primary Energy	MJ	8,92E+03	6,87E+02	4,30E+01	1,05E+01	8,18E+03	3,22E+00
Net use of freshwater	m³	5,74E-01	3,29E-01	2,72E-04	8,59E-03	2,22E-01	1,44E-02
Hazardous waste disposed	kg	7,11E+01	6,69E+01	0*	9,83E-03	5,03E+00	0*
Non hazardous waste disposed	kg	7,88E+01	3,55E+01	1,08E-01	2,93E+00	3,87E+01	1,50E+00
Radioactive waste disposed	kg	1,67E-02	7,54E-03	7,70E-05	3,62E-04	8,11E-03	6,18E-04
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for recycling	kg	4,52E-01	0*	0*	4,52E-01	0*	0*

PRODUCT ENVIRONMENTAL PROFILE

Materials for energy recovery	kg	1,91E-01	0*	0*	1,91E-01	0*	0*
Exported Energy	MJ by energy vector	0,00E+00	0*	0*	0*	0*	0*

Biogenic carbon content in the reference product:

Biogenic carbon content of the product	kg of C	0,00E+00	0*	N/A	N/A	N/A	N/A
Biogenic carbon content of the associated packaging	kg of C	1,98E-01	1,98E-01	N/A	N/A	N/A	N/A

NB : 0* means that this impact either represents less than 0.01% of the total life cycle of the reference flow, or has no impact (in the case where the total impact is zero).

For the use stage (U), the product does not require maintenance therefore the impacts values are representatives of the B6 use phase:

"Energy requirements during the use stage"

Registration number : SOCO-00067-V01.02-EN			Drafting Rules : "PEP-PCR-ed4-EN 2021 09 06"	
			Supplemented by : "PSR-0005-ed3-EN-2023 06 06"	
Verifier accreditation number : VH12			Information and reference documents : www.pep-ecopassport.org	
Date of issue: 07-2023			Validity period : 5 years	
Independent verification of the declaration and data in compliance with ISO 14025 : 2006				
Internal :		☒	External : ☐	
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)				
PEPs are compliant with XP C08-100-1 : 2016 or EN 50693:2019				
The components of the present PEP may not be compared with components from any other program.				
Document complies with ISO 14025:2006 “Environmental labels and declarations. Type III environmental declarations”				

This document is intended to be only informative and non-contractual and does not create any right or obligation or commitment for Socomec towards its associates, customers or any other person or entity. All the values indicated in this document may change depending on many factors (use conditions, applications, installations, environment...). The life time mentioned in this document is only indicative and is not intended to be the minimal, maximal or average life time of the product.

Other references covered and extrapolation

For the products covered by the PEP other than the reference product, the environmental impacts of each phase of the lifecycle may be calculated with extrapolation factors following the proportionality rules that you can find below.

Extrapolation factors are determined as follows and can be provided upon request:

- For the Manufacturing and Distribution phases they are proportional to the mass of the product with its packaging;
- For the Installation phase they are proportional to the mass of the packaging;
- For the Use phase they are proportional to the power losses of the product;
- For the End of Life phase they are proportional to the mass of the product without its packaging.

Model	Reference
INOSYS LBS 800A IEC 2P2 1500V	86P22081
INOSYS LBS 800A IEC 2P2 ESS	86E22081
INOSYS LBS 800A UL 2P2 1500V	87P22081
INOSYS LBS 800A UL 2P2 ESS	87E22081
INOSYS LBS 1000A IEC 2P2 1500V	86P22100
INOSYS LBS 1000A IEC 2P2 ESS	86E22100
INOSYS LBS 1000A UL 2P2 1500V	87P22100
INOSYS LBS 1000A UL 2P2 ESS	87E22100
INOSYS LBS 1250A IEC 2P2 1500V	86P22125
INOSYS LBS 1250A IEC 2P2 ESS	86E22125
INOSYS LBS 1200A UL 2P2 1500V	87P22120
INOSYS LBS 1200A UL 2P2 ESS	87E22120
INOSYS LBS 1400A IEC 2P2 1500V	86P22140
INOSYS LBS 1400A IEC 2P2 ESS	86E22140
INOSYS LBS 1600A IEC 2P2 1500V	86P22160
INOSYS LBS 1600A IEC 2P2 ESS	86E22160
INOSYS LBS 1000VDC 2P 160A	86P02016
INOSYS LBS 1500VDC 2P 160A	86P02017
INOSYS LBS 1000VDC 2P 250A	86P02025
INOSYS LBS 1500VDC 2P 250A	86P02026
INOSYS LBS 1000VDC 2P 315A	86P02031
INOSYS LBS 1500VDC 2P 315A	86P02032
INOSYS LBS 1000VDC 2P 400A	86P02040
INOSYS LBS 1500VDC 2P 400A	86P02041
INOSYS LBS 1500VDC 2P 630A	86P02064
INOSYS LBS 1500VDC 3P 160A	86P03016
INOSYS LBS 1500VDC 3P 250A	86P03025
INOSYS LBS 1500VDC 3P 315A	86P03031
INOSYS LBS 1500VDC 1+1 160A	86P11017
INOSYS LBS 1500VDC 1+1 250A	86P11026
INOSYS LBS 1500VDC 1+1 315A	86P11032
INOSYS LBS 1500VDC 1+1 400A	86P11041
INOSYS LBS 1500VDC 1+1 630A	86P11064

PRODUCT ENVIRONMENTAL PROFILE

INOSYS LBS 1500VDC 2+2 400A	86P22041
INOSYS LBS 1500VDC 2+2 630A	86P22064
INOSYS LBS 1000VDC 2P 10A UL	87P02001
INOSYS LBS 1000VDC 2P 100A UL	87P02010
INOSYS LBS 1500VDC 2P 100A UL	87P02011
INOSYS LBS 1000VDC 2P 250A UL	87P02025
INOSYS LBS 1500VDC 2P 250A UL	87P02026
INOSYS LBS 1500VDC 2P 325A UL	87P02033
INOSYS LBS 1000VDC 2P 400A UL	87P02040
INOSYS LBS 1500VDC 2P 400A UL	87P02041
INOSYS LBS 1000VDC 2P 500A UL	87P02050
INOSYS LBS 1500VDC 2P 500A UL	87P02051
INOSYS LBS 1500VDC 2P 600A UL	87P02061
INOSYS LBS 1500VDC 3P 250A UL	87P03025
INOSYS LBS 1500VDC 3P 600A UL	87P03060
INOSYS LBS 1500VDC 1+1 100A UL	87P11011
INOSYS LBS 1500VDC 1+1 200A UL	87P11021
INOSYS LBS 1500VDC 1+1 250A UL	87P11026
INOSYS LBS 1500VDC 1+1 400A UL	87P11041
INOSYS LBS 1500VDC 1+1 500A UL	87P11051
INOSYS LBS 1500VDC 1+1 600A UL	87P11061
INOSYS M 1000VDC 2+2P 100A UL	87P22010
INOSYS LBS 1500VDC 2+2 400A UL	87P22041
INOSYS LBS 1500VDC 2+2 500A UL	87P22051
INOSYS LBS 1500VDC 2+2 600A UL	87P22061
INOSYS LBS 1500VDC 0+2P 500A	86P02051
INOSYS LBS 1500VDC 1+1P 500A	86P11051
INOSYS LBS 1500VDC 2+2P 500A	86P22051
INOSYS LBS 2000VDC 1+2 400A	88P12041
INOSYS LBS 2000VDC 1+2 500A	88P12051
INOSYS LBS 2000VDC 1+2 630A	88P12064
INOSYS LBS 2000VDC 2+2 400A	88P22041
INOSYS LBS 2000VDC 2+2 500A	88P22051
INOSYS LBS 2000VDC 2+2 630A	88P22064