


Selection guide

Software solutions for energy monitoring and analysis

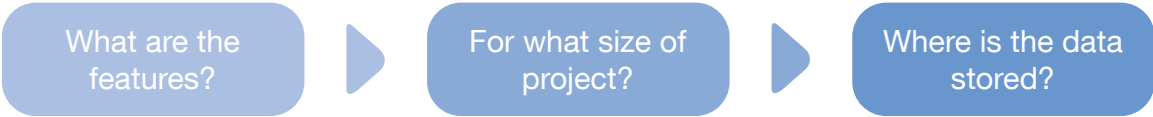


	WEBVIEW-S	WEBVIEW-M	WEBVIEW-L
Hosting of the application⁽¹⁾	DIRIS A-40 Ethernet <i>p. 424</i>	DIRIS Digiware M-70 /D-70 <i>p. 424</i>	DATALOG H80/H81 <i>p. 424</i>
Data collection			
Maximum number of connected measurement devices	1	32	100 (WEBVIEW-L100) 200 (WEBVIEW-L200)
Interfacing to third-party applications			via connector
Export of data in CSV format	•	•	•
Real time monitoring			
U/V voltages and currents I	•	•	•
Powers P, Q, S, Power factor	•	•	•
Quality monitoring THDi, THDu, THDv, K factor, Harmonic analysis up to 63 rd	•	•	•
Energy metering Ea+, Ea-, Er+, Er-, Es	•	•	•
Pulse counting	•	•	•
Input/Output monitoring	•	•	•
Measurement history U, V, I, P, Q, S,	•	•	•
Energy analysis			
Energy consumption analysis	•	•	•
Multi-parameter analysis			•
Alarm management			
Product alarms	•	•	•
Alarms history	•	•	•
Transmission of alarms	e-mail	e-mail	e-mail
Reporting management			
Customisable user interface		Photoview	Photoview
Hierarchy management		•	•
Conformity to standards			
Energy Server Standard - IEC 62974-1		•	•

(1) For more information on the hardware please refer to the appropriate catalogue pages.
 (2) N'VIEW is a software solution intended for energy management purposes only.

Architecture


Level 4

Cloud hosting



Level 3

Long-distance communication network (WAN)

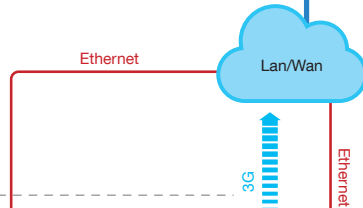


Level 2

Local communication network (LAN)



Level 1

PMD & sensors

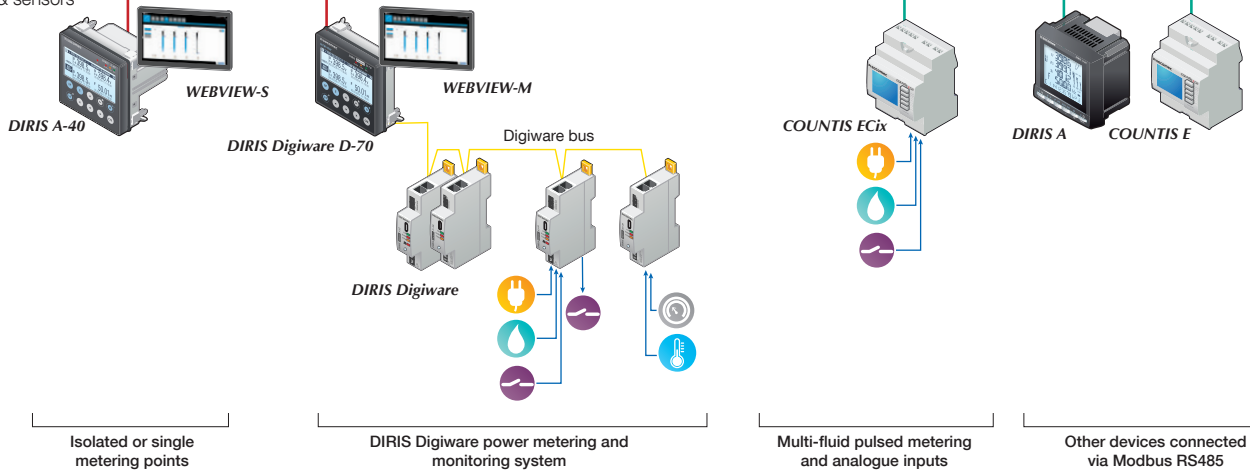

SOFT_1820_C_GB

Expert Services

Require integration onto your network?

No problem for our Expert Services team. They work out all the details of the measurement schedule, the complete integration of all devices in your energy management system, the configuration of your software application, the training of your teams and details of operational support. For further information, please contact your nearest Socomec office.